


RX-8800



- 64K PERSONAL COMPUTER
 - 188 FUNCTION KEY
 - 10 USER DEFINE KEY
- (KEEP MEMORY 5 YEARS)

申請專利·
請勿仿製！

RX-8800

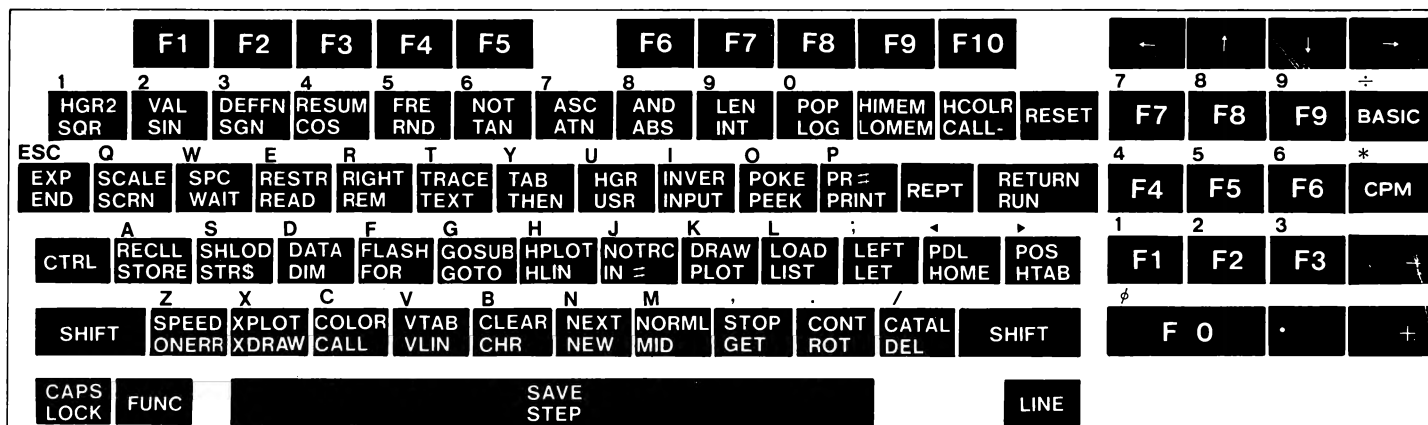

Intelligent key board Operation Manual

1. User Defined Function Key

- F1, F2, F3, F4, F5, F6, F7, F8, F9, F10 is a User Defined Function Key.
- Each key can storage 48 characters, and may be changed at any time, Keeps memory for 5 years.
- At the same time, press "CTRL", "REPT" then release it. Press (any Key of F1, F2, F10) Key. Input data. Press Return 2 times to terminate entry mode.
- Press F1, F2 . . . , F10 to output the data.

2. Using method for 94 BASIC, 94 CPM FUNCTION

- At the same time, press "FUNC", "*" (numeric key) it will entrance into 94 CPM. MBASIC FUNCTION.
- At the same time, press "FUNC", "÷" (numeric key) it will entrance into 94 APPLESOFT BASIC FUNCTION.
- The Keyboard is in Applesoft Basic mode on Power up.

3. Caps Lock

- When you press the "CAPS LOCK" key, your computer will be in "abcde".
- When you release the "CAPS LOCK" key, your computer will be in "ABCDE"

4. Auto Line Number

- After you press the "LINE" key, a line number will appear on your monitor automatically.
- After you turn on or reset your computer will auto-jump to 20, then 30, 40 . . . etc.

5. Function Key.

- This "intelligent keyboard" includes 94 function. When you press "FUNC" key (do not release), and push the special key you want, then you will find the word you need on the screen.
- If you push the "FUNC" and "SHIET" at the same time, the word above the key button will appear on the monitor.

6. Auto Repeat

- After you press a key for more than 0.75 seconds, your computer will repeat this word automatically at 12 words per second.

PROGRAM \ PRESS TIMES	NORMAL	M x x x E FUNC KEY	RX-800 FUNC KEY	RX-8800 USERS DEFINE KEY
1 GR	4	4	3	
2 FOR I = 0 TO 39	12	10	9	
3 COLOR = .I/3	11	7	5	
4 VLIN 0, 39 AT I	13	10	9	
5 NEXT	6	3	2	
TOTAL	46	34	28	1